


NOTES:

- 1 - TOP OF PERFORATED PIPE MUST BE AT OR BELOW THE TOP OF FOOTING.
- 2 - BACKFILL MUST BE SIZED AT LEAST ONE SIEVE SIZE (ROCK SIZE) LARGER THAN DIMENSIONS OF PERFORATIONS, OTHERWISE A GEOTEXTILE WRAP AROUND THE PIPE IS REQUIRED.
- 3 - FOR NATIVE SOIL WITH HIGH SAND CONTENT, A GEOTEXTILE BETWEEN THE BACKFILL AND NATIVE SOIL SHOULD BE USED. FOR NATIVE SOIL WHERE THE CLAY CONTENT EXCEEDS 50% OR THE SILT CONTENT EXCEEDS 40%, A GEOTEXTILE IS NOT REQUIRED AROUND THE PIPE.
- 4 - FOR NATIVE SOIL WITH LESS THAN 50% PASSING THE NO. 200 SIEVE, THE APPARENT OPENING SIZE (AOS) OF THE FABRIC SHOULD BE AT LEAST A NO. 30 SIEVE, FOR NATIVE SOIL WITH MORE THAN 50% PASSING THE NO. 200 SIEVE, THE AOS OF THE FABRIC SHOULD BE AT LEAST A NO. 50 SIEVE.
5. IF VEHICULAR LOADS ARE EXPECTED, A MINIMUM OF 12-INCHES OF COVER IS REQUIRED OVER THE TOP OF THE PIPE.

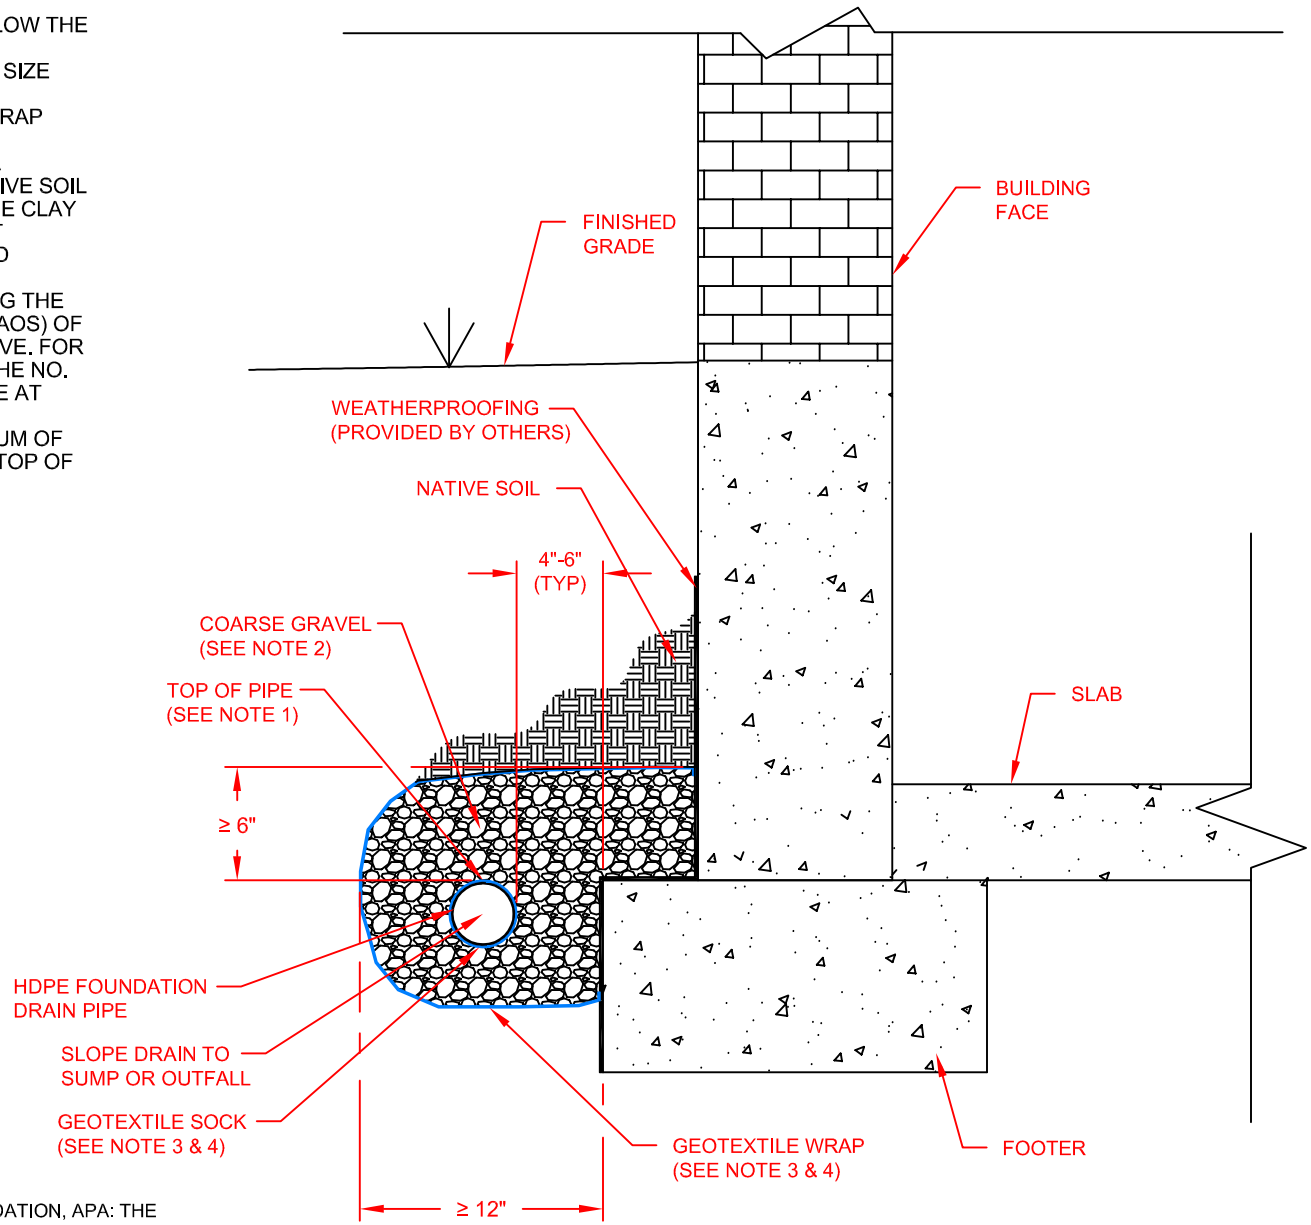

REFERENCES:

- 1 - STEPS TO CONSTRUCTION MOISTURE -RESISTANT FOUNDATION, APA: THE ENGINEERED WOOD ASSOCIATION
- 2 - "FOUNDATION FOOTING DRAINAGE" www.selfhelpandmore.com, DEC-18-2005

© 2016 ADS, INC.

2	FORMATTING UPDATES	TJR	03/07/16	
REV.	DESCRIPTION	BY	MM/DD/YY	CHK'D

ADVANCED DRAINAGE SYSTEMS, INC. ("ADS") HAS PREPARED THIS DETAIL BASED ON INFORMATION PROVIDED TO ADS. THIS DRAWING IS INTENDED TO DEPICT THE COMPONENTS AS REQUESTED. ADS HAS NOT PERFORMED ANY ENGINEERING OR DESIGN SERVICES FOR THIS PROJECT, NOR HAS ADS INDEPENDENTLY VERIFIED THE INFORMATION SUPPLIED. THE INSTALLATION DETAILS PROVIDED HEREIN ARE GENERAL RECOMMENDATIONS AND ARE NOT SPECIFIC FOR THIS PROJECT. THE DESIGN ENGINEER SHALL REVIEW THESE DETAILS PRIOR TO CONSTRUCTION. IT IS THE DESIGN ENGINEERS RESPONSIBILITY TO ENSURE THE DETAILS PROVIDED HEREIN MEETS OR EXCEEDS THE APPLICABLE NATIONAL, STATE, OR LOCAL REQUIREMENTS AND TO ENSURE THAT THE DETAILS PROVIDED HEREIN ARE ACCEPTABLE FOR THIS PROJECT.

FOUNDATION DRAIN	
DRAWING NUMBER:	STD-1005



4640 TRUEMAN BLVD
HILLIARD, OHIO 43026

DRAWN BY:	MGB
DATE:	4/12/04
CHK'D BY:	
SCALE:	NTS
SHEET:	1 OF 1